

MIPRO

Wireless Innovators

Digital Portable Receiver

MTG-100T/MTG-100Ta



LCD Screen
Channel, Battery status,
RF & audio signals,
gain level & RF power

3.5 mm MINI-JACK
Secured screw-lock
for microphone or line input

Programmable parameters
Channel, Sensitivity level,
Audio input source, RF output power

ACT Sync Port
ACT™ syncs the transmitter
and receiver frequency automatically

Rechargeable Battery
Up to 12 hours life per charge
or Disposable Batteries

Features

- Ultra Compact, Ultra Lightweight
- Secured Digital Transmission, Crystal Clear Audio
- Optimum Reception
- Rechargeable Battery & AA Battery Models
- 16 User Selectable Channels


Rare View



MTG-100T



MTG-100Ta

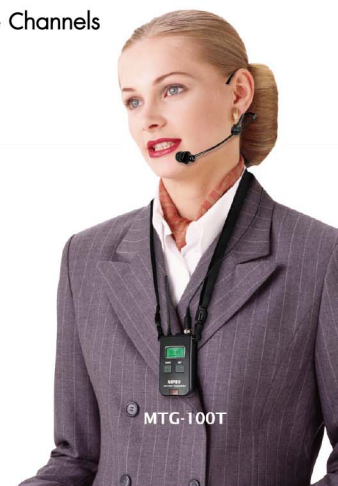

MTG-100T

Specifications

Receiver & Transmitter	MTG-100T	MTG-100Ta
Frequency Range	UHF 794-806 MHz	UHF 794-806 MHz
Oscillation Mode	PLL synthesized	PLL synthesized
RF Output Power	< 10 mW (Low/ Mid/ High, Switchable)	< 10 mW (Low/ Mid/ High, Switchable)
Sensitivity	N/A	N/A
Frequency Response	50 Hz ~ 10 kHz	50 Hz ~ 10 kHz
Power Supply	Built-in high capacity lithium polymer rechargeable battery	2 x AA batteries
Operating Hours	Up to 12 hours	Up to 12 hours
Automatic Shut-Off Time	10 minutes~42 hours (programmeble)	6 hours (programmable)
Dimension (WxHxD)	45 x 84 x 21mm / 1.8 x 3.3 x 0.8"	45 x 84 x 28mm / 1.8 x 3.3 x 1.1"
Weight	65 g / 2.3 oz (li-poly battery included)	72 g / 2.54 oz (excluding AA batteries)

MTG-100 Series

Digital Wireless Tour Guide System

Application
Guide Tour
Assistive Listening
Language Interpretation

Digital Portable Receiver

MTG-100R/MTG-100Ra



Features

- Ultra Compact, Ultra Lightweight
- Secured Digital Transmission. Crystal Clear Audio
- Optimum Reception
- Rechargeable Battery & AA Battery Models
- 16 User Selectable Channels

Rare View



MTG-100R



MTG-100Ra



Specifications

Receiver & Transmitter	MTG-100R	MTG-100Ra
Frequency Range	UHF 794-806 MHz	UHF 794-806 MHz
Oscillation Mode	PLL synthesized	PLL synthesized
RF Output Power	N/A	N/A
Sensitivity	Approx. -90 dBm	Approx. -90 dBm
Frequency Response	50 Hz ~ 10 kHz	50 Hz ~ 10 kHz
Power Supply	Built-in high capacity lithium polymer rechargeable battery	2 x AA batteries
Operating Hours	Up to 14 hours	Up to 14 hours
Automatic Shut-Off Time	10 minutes ~ 42 hours (programmable)	6 hours (programmable)
Dimension (WxHxD)	45 x 84 x 21mm / 1.8 x 3.3 x 0.8"	45 x 84 x 28mm / 1.8 x 3.3 x 1.1"
Weight	65 g /2.3 oz (li-poly battery included)	72 g /2.54 oz (excluding AA batteries)