ITOA MEGAPHONE (WITH WHISTLE SIGNAL) ER-2230W/(EU)

■ DESCRIPTION

The ER-2230W is a shoulder megaphone having facilities of EXT. mic input, an AUX input, a DC power input, a battery meter whistle sound. It can be mounted to the optional ST-16A speaker stand. The newly developed polyimide diaphragm is employed to ensure high sound quality.

■ SPECIFICATIONS

(*1) 0 dB = 1 V

Battery: R20P (D) × 10 (15 V DC)
External Power: 12 V DC Battery
30 W
45 W
Whistle (1.6 to 2.4 kHz)
Voice: Approx. 17 hours (JEITA (*2)), Whistle: Approx. 90 min. (JEITA (*2))
Voice: Approx. 800 m (JEITA (*2)), Whistle: Approx. 1000 m (JEITA (*2))
-10 dB (*1) (300 mV), 10 kΩ (Ø3.5 mini jack, stereo plug acceptable) ,
volume control
600 Ω, unbalanced, Ø6.3 phone jack, volume control
Polyimide film (voice coil, bobbin)
LED (also serves as a power indicator)
Steady ON: Normal use, Flashing: Batteries need replacement
−10 °C to +40 °C
Horn ring: Vinyl chloride, gray
Horn: Aluminum, light gray, paint
Case top: Die—cast aluminum, gray, paint
Strap: Nylon, black, Others: ABS resin, gray
Ø351 × 512 mm
3.6 kg (without batteries) , Microphone: 150 g
Ø3.5 mini plug (AUX input)···1, External power supply cord (1 m)···1,
Splash-proof cover···1 (*3)
Speaker stand: ST-16A, Microphone: DM series


(*2) JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)
(*3) Do not use the unit in heavy rains or strong winds, or in locations where the unit is directly exposed to water even using with the supplied splash-proof cover.

Note: Batteries are optional.

■ APPEARANCE

<Note on the audible range and battery life>

- 1. The indications of the audible range and battery life are based on the JEITA Standard (*2).
- 2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street. It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.
- 3. Battery Life assumes that megaphone is used for 30 minutes a day.

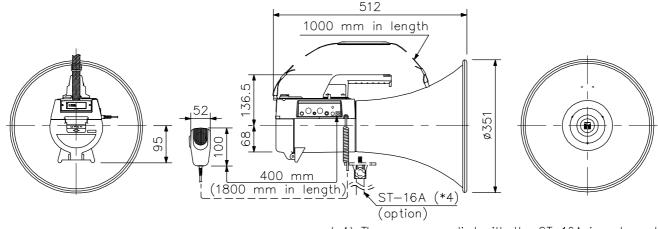

(*4) The spacer supplied with the ST-16A is not used.

Side View Front View

SCALE: 1/10 UNIT: mm

Rear View