Features

- Mono or bi-directional (D models)
- 20\//
- 6.5" full range transducer
- 50, 70, 100V
- IP44 (WP models)

CSP-220 speakers are high-quality sound projectors designed for Public Address. Mono or bi-directional (D models), they are equipped with 6.5" full range transducers. They are the ideal solution for high intelligibility of speech and music outdoor or indoor. All models integrate high impedance outputs for 100V, 70V and 50V installations. The built-in transformer gives the choice of three power levels.


Made of ABS resin the cabinet is scratch and shock resistant. The WP models are IP44 rated and can be used in covered installation not exposed to excessive dampness.



Specifications

MODEL	CSP-220 / CSP-220WP / CSP-220D / CSP-220DWP
Rated Power (RMS)	20W
Output	5, 10, 20W
Transducer	1 x 6.5" 8Ω paper cone (CSP-220)
	1 x 6.5" 8Ω plastic cone (CSP-220WP)
	2 x 6.5" 8Ω paper cone (CSP-220D)
	2 x 6.5" 8Ω plastic cone (CSP-220DWP)
Input Voltage	50, 70, 100V
Impedance	100V: 2kΩ, 1kΩ, 500Ω
	70V: 1kΩ, 490Ω, 245Ω
	50V: 500Ω, 245Ω, 125Ω
Frequency Response	100Hz~20KHz
SPL (1W/1m)	94dB
Materiel	ABS resin
Protection rate	IP44 (WP models)
Dimensions (Diam. x L)	180 x 251.5 mm
Weight	2.2kg (CSP-220, CSP-220WP) - 3kg (CSP-220D, CSP-220DWP)



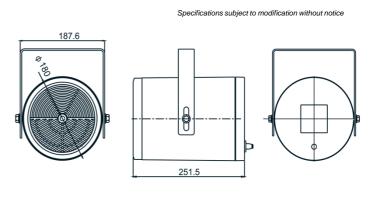

SEIKAKU TECHNICAL GROUP LIMITED