




LTA-2000MP3


Feature

- Power Output 2,000 Wrms @ 4 Ω 100 V / 150 V / 200 V
- Built in BLUETOOTH / USB / SD Card MP3 Player / FM Tuner with Remote Control
- 2 Mic / Aux Inputs 3-EQ with Priority Switch
- 4 Mic / Aux Inputs 3-EQ with Echo Switch
- Telephone Input / Output, Aux input
- 3-EQ Master, Horn / HI-FI with Hotline Switch
- ON, 2 x 6 LED VU Indicators
- Send, Return, Pre Out, Amp In, Double Out
- Power ON Soft Start & Output Delay
- Switch Line Output Selector สวิตช์ต่อระบบไลน์ ใช้สำหรับเลือกการทำงานของระบบไลน์ หรือ ระบบ PA โดยจะทำงานร่วมกับวงจร HPF อัตโนมัติเมื่อใช้ระบบไลน์
- Full Protection DC Out Overload and Over Temperature

รูปแบบการต่อใช้งานด้านหน้า กับอุปกรณ์ภายนอก

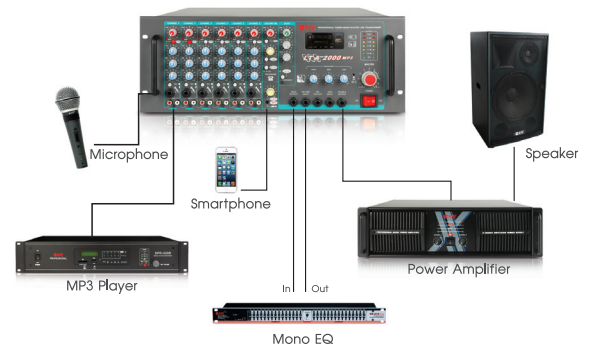

รูปแบบการต่อใช้งานด้านหลัง กับระบบ Line Matching, Hotline Remote

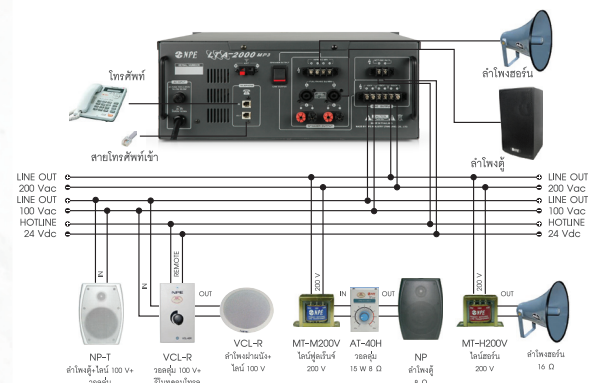

Note: 0dBu=0.775Wrms, 0dBV=1Wrms

SPECIFICATION

LTA-2000MP3

Frequency Response: @ Pre out	
Mic input	20 Hz - 20 kHz
Aux input	20 Hz - 20 kHz
Frequency Response: @ 4 Ω	
Amp input	91 Hz - 40 kHz
Channel Equalizer:	Low 80 Hz ±15 dB Shelving Mid 2.5 kHz ±15 dB Peaking High 12 kHz ±15 dB Shelving
Master Equalizer:	Low 60 Hz ±6 dB Shelving Mid 700 Hz ±6 dB Peaking High 10 kHz ±6 dB Shelving
Hum & Noise: @ 4 Ω	
Mic input	-28 dBu
Aux input	-30 dBu
Amp input	-47 dBu
Input Impedance:	
Mic input	2.7 kΩ
Aux input	4 kΩ
Amp input	6.7 kΩ
Input Sensitivity: @ Pre out	
Mic input	-55 dBu
Aux input	-20 dBu
Amp input	0 dBu
Maximum Input Level:	
Mic input	-24 dBu
Aux input	+11 dBu
Input:	Microphone 6 CHs, Auxiliary 6 CHs, Telephone on Line 1 CH
Function:	Priority 2 CHs, Echo 4 CHs & Send Output, Return Input, Pre Output, Amp Input, Double Output 1 CH each
BLUETOOTH Frequency Response:	60 Hz - 15 kHz 0, -3 dB
FM Tuner Frequency:	87.5 MHz - 108 MHz
Power: @ THD+N < 1 %, 1 kHz 4 Ω	1,750 Wrms
Power: @ THD+N < 5 %, 1 kHz 4 Ω	2,000 Wrms
Power: @ Line 100 V, 150 V, 200 V	2,000 Wrms
Output Indicator:	ON, -16, -11, -6, -3, 0, Clip
Power Requirement:	220 Vac 50 Hz
Power Consumption:	
Idle	92 VA
Rate Power @ 4 Ω	2,420 VA
Fan Cooling:	1 Fan Left to Right Airflow
AC Fuse / DC Fuse:	T20 A / F20 A
Dimension:	483 x 177 x 522 mm.
Net Weight:	51.2 kg (112.64 lbs)