




SRX906LA AF

Array Frame for SRX906LA

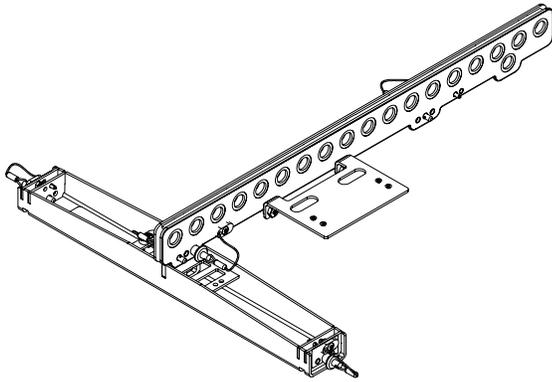


HIGHLIGHTS


- Compact and lightweight design
- Precision pick-point resolution
- Two-part collapsible design
- Support for third-party laser inclinometers
- Support for up to (16) SRX906LA
- Compatible shackle size: 1/2 in

DESCRIPTION

The SRX906LA AF is a lightweight and compact array frame for suspending SRX906LA arrays. The array frame was designed to work with single-point and front-back suspension methods. For single-point applications, the array frame can be used in conjunction with the VTX RC500 rotating clamp, allowing smaller SRX906LA arrays to be suspended from standard size trusses or pipes. The two-piece design is comprised of one extension bar and one spreader bar. The extension bar can extend to the front or rear of the frame to accommodate both uptilt and downtilt aiming options. Three connection points are available for attaching the extension bar to the spreader bar, allowing for precise control of shackle positioning for single-point applications. Support for third-party inclinometers is available using the included laser attachment bracket. The two parts can be collapsed easy for storage. For more information about the array frame and use cases, refer to the **SRX900 Series Rigging Manual**.

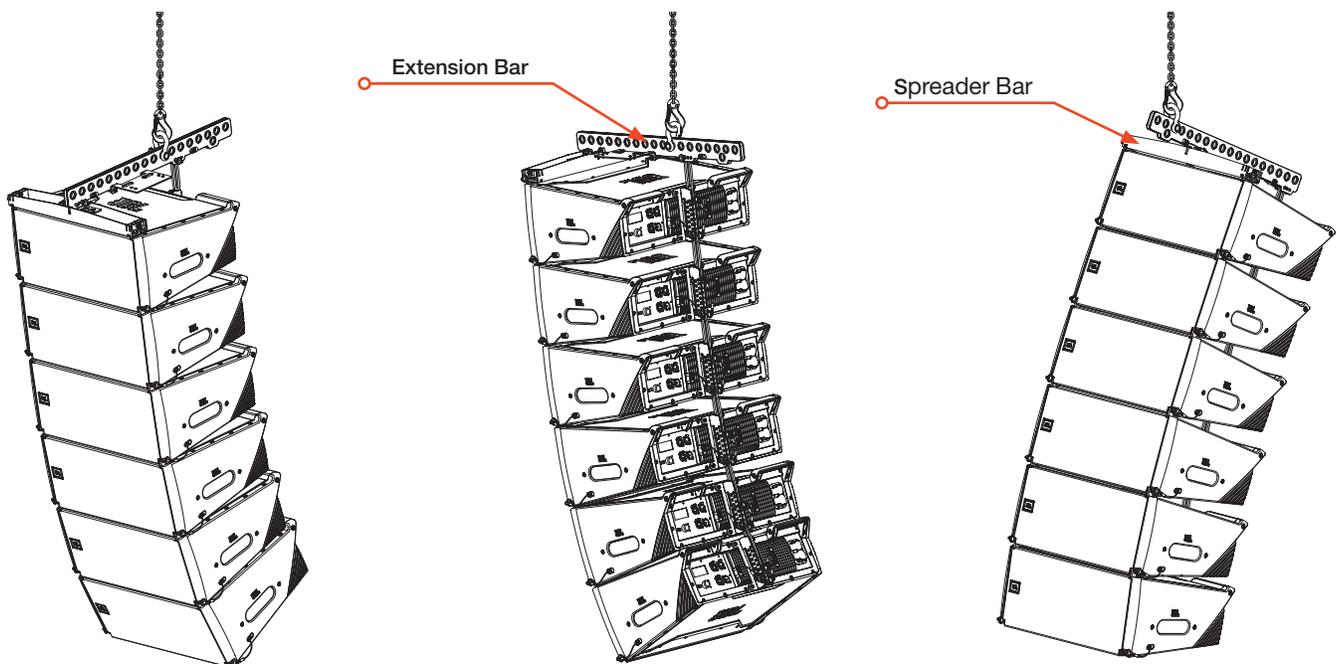

DIMENSIONS

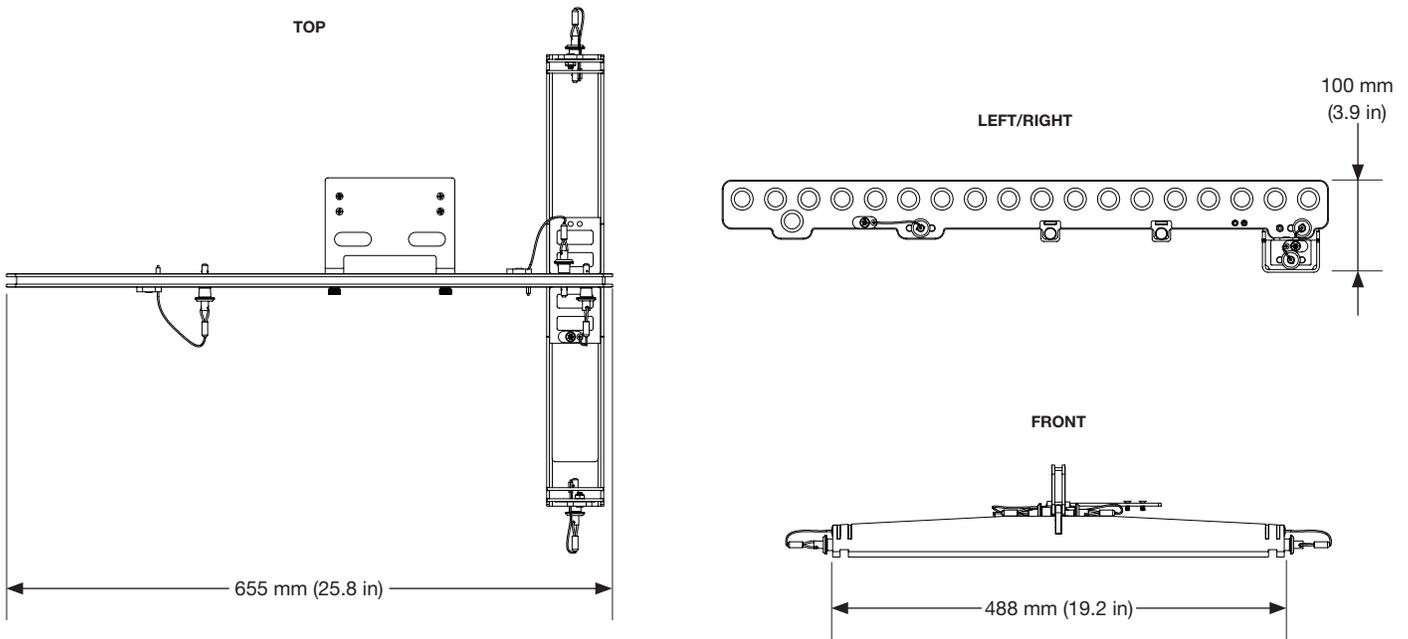

TECHNICAL SPECIFICATIONS

PHYSICAL	
Construction :	High-grade steel with anti-corrosion coating
Finish :	Black powder coat
Compatible Shackle Size :	1/2-inch
Compatible Lasers :	TEQ-SAS, RECLINE
Mechanical Limits¹	
Safe Limit :	(14) SRX906LA
Maximum Limit :	(16) SRX906LA
Dimensions (H x W x D)²:	100 mm x 488 mm x 655 mm (3.9 in x 19.2 in x 25.8 in)
Net Weight³ :	4.1 kg (9 lbs)
Shipping Weight :	5.0 kg (11 lbs)

ORDERING INFORMATION	
SKU :	JBL-P3231MX SRX906LA AF
Included :	(1) Spreader Bar (1) Extension Bar (1) 1/2-inch Shackle #5118578 (1) Laser Bracket #5128892 Laser Bracket Hardware

Footnotes:

1: Always check mechanical safety with JBL Line Array Calculator 3 software before use. For more information on Safe and Maximum Limits, refer to the **SRX900 Series Rigging Manual**.

2: Refer to the 2D and 3D Customer Drawings for more detailed dimensions.

3: Weight includes spreader bar, extension bar and laser bracket. Shackles and other rigging parts not included.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.