



# LTA-Series MP3

### Feature


- Power Output 1,500Wrms @ 4Ω100V/150V/200V
- Built in BLUETOOTH / USB / SD Card MP3 Player / FM Tuner with Remote Control
- 2 Mic / Aux Inputs 3-EQ With Priority Switch
- 4 Mic / Aux Inputs 3-EQ With Echo Switch
- Telephone Input / Output, Aux input
- 3-EQ master, Horn / HI-FI with Hotline Switch
- ON, 2x6 LED VU Indicators
- Send, Return, Pre Out, Amp In, Double Out
- Power ON Soft Start & Output Delay
- Full Protection DC out Overload and Temperature

SPECIFICATION	LTA-1000 MP3	LTA-1500 MP3
Frequency Response @Pre out Mic input Aux input	20Hz - 20kHz	
Frequency Response @4Ω Amp input	35Hz - 34kHz	35Hz - 40kHz
Channel Equalizer	Low 80Hz ± 15dB shelving Mid 2.5kHz ± 15dB peaking High 12kHz ± 15dB shelving	
Master Equalizer	Low 60Hz ± 6dB shelving Mid 700Hz ± 6dB peaking High 10kHz ± 6dB shelving	
Hum & Noise @4Ω Mic input Aux input Amp input	-28dBu -30dBu -47dBu	
Input Impedance Mic input Aux input Amp input	2.7kΩ 4kΩ 6.7kΩ	
Input Sensitivity @Pre out Mic input Aux input Amp input	-55dBu -20dBu 0dBu	
Maximum Input Level Mic input Aux input	-24dBu +11dBu	
Input	6 Microphone, 6 Auxiliary 1ch Telephone on Line	
Function	2 Priority, 4 Echo, Send Output, Return, Pre Output Amp Input, Double Output	
Power @ THD+N < 1%, 1kHz 4Ω	950W (RMS)	1,400W (RMS)
Power @ THD+N < 5%, 1kHz 4Ω	1,000W (RMS)	1,500W (RMS)
Power @ Line 100V, 150V, 200V	1,000W (RMS)	1,500W (RMS)
Output Indicator	ON, -16,-11,-6,-3,0, Clip	
Power Requirement	220V 50Hz	
Power Consumption Idle Rate Power @ 4Ω	92VA 1,500VA	92VA 2,200VA
Cooling	1 fan	
AC Fuse	20A	
DC Fuse	20A	
Dimension Packing Dimension (WxHxD)	483x177x525mm. 531x259x650mm.	482x133x522mm. 522x242x642mm.
Weight Gross Weight	37Kg(81.4lbs) 38.8Kg(85.36lbs)	41Kg(90.2lbs) 42.8Kg(94.2lbs)

Note: 0dBu=0.775Vrms, 0dBV=1Vrms

All features & specifications subject to change without notice.©NPE Industry (Thailand) Co.,Ltd

รูปแบบการต่อใช้งานด้านหน้า กับอุปกรณ์ภายนอก

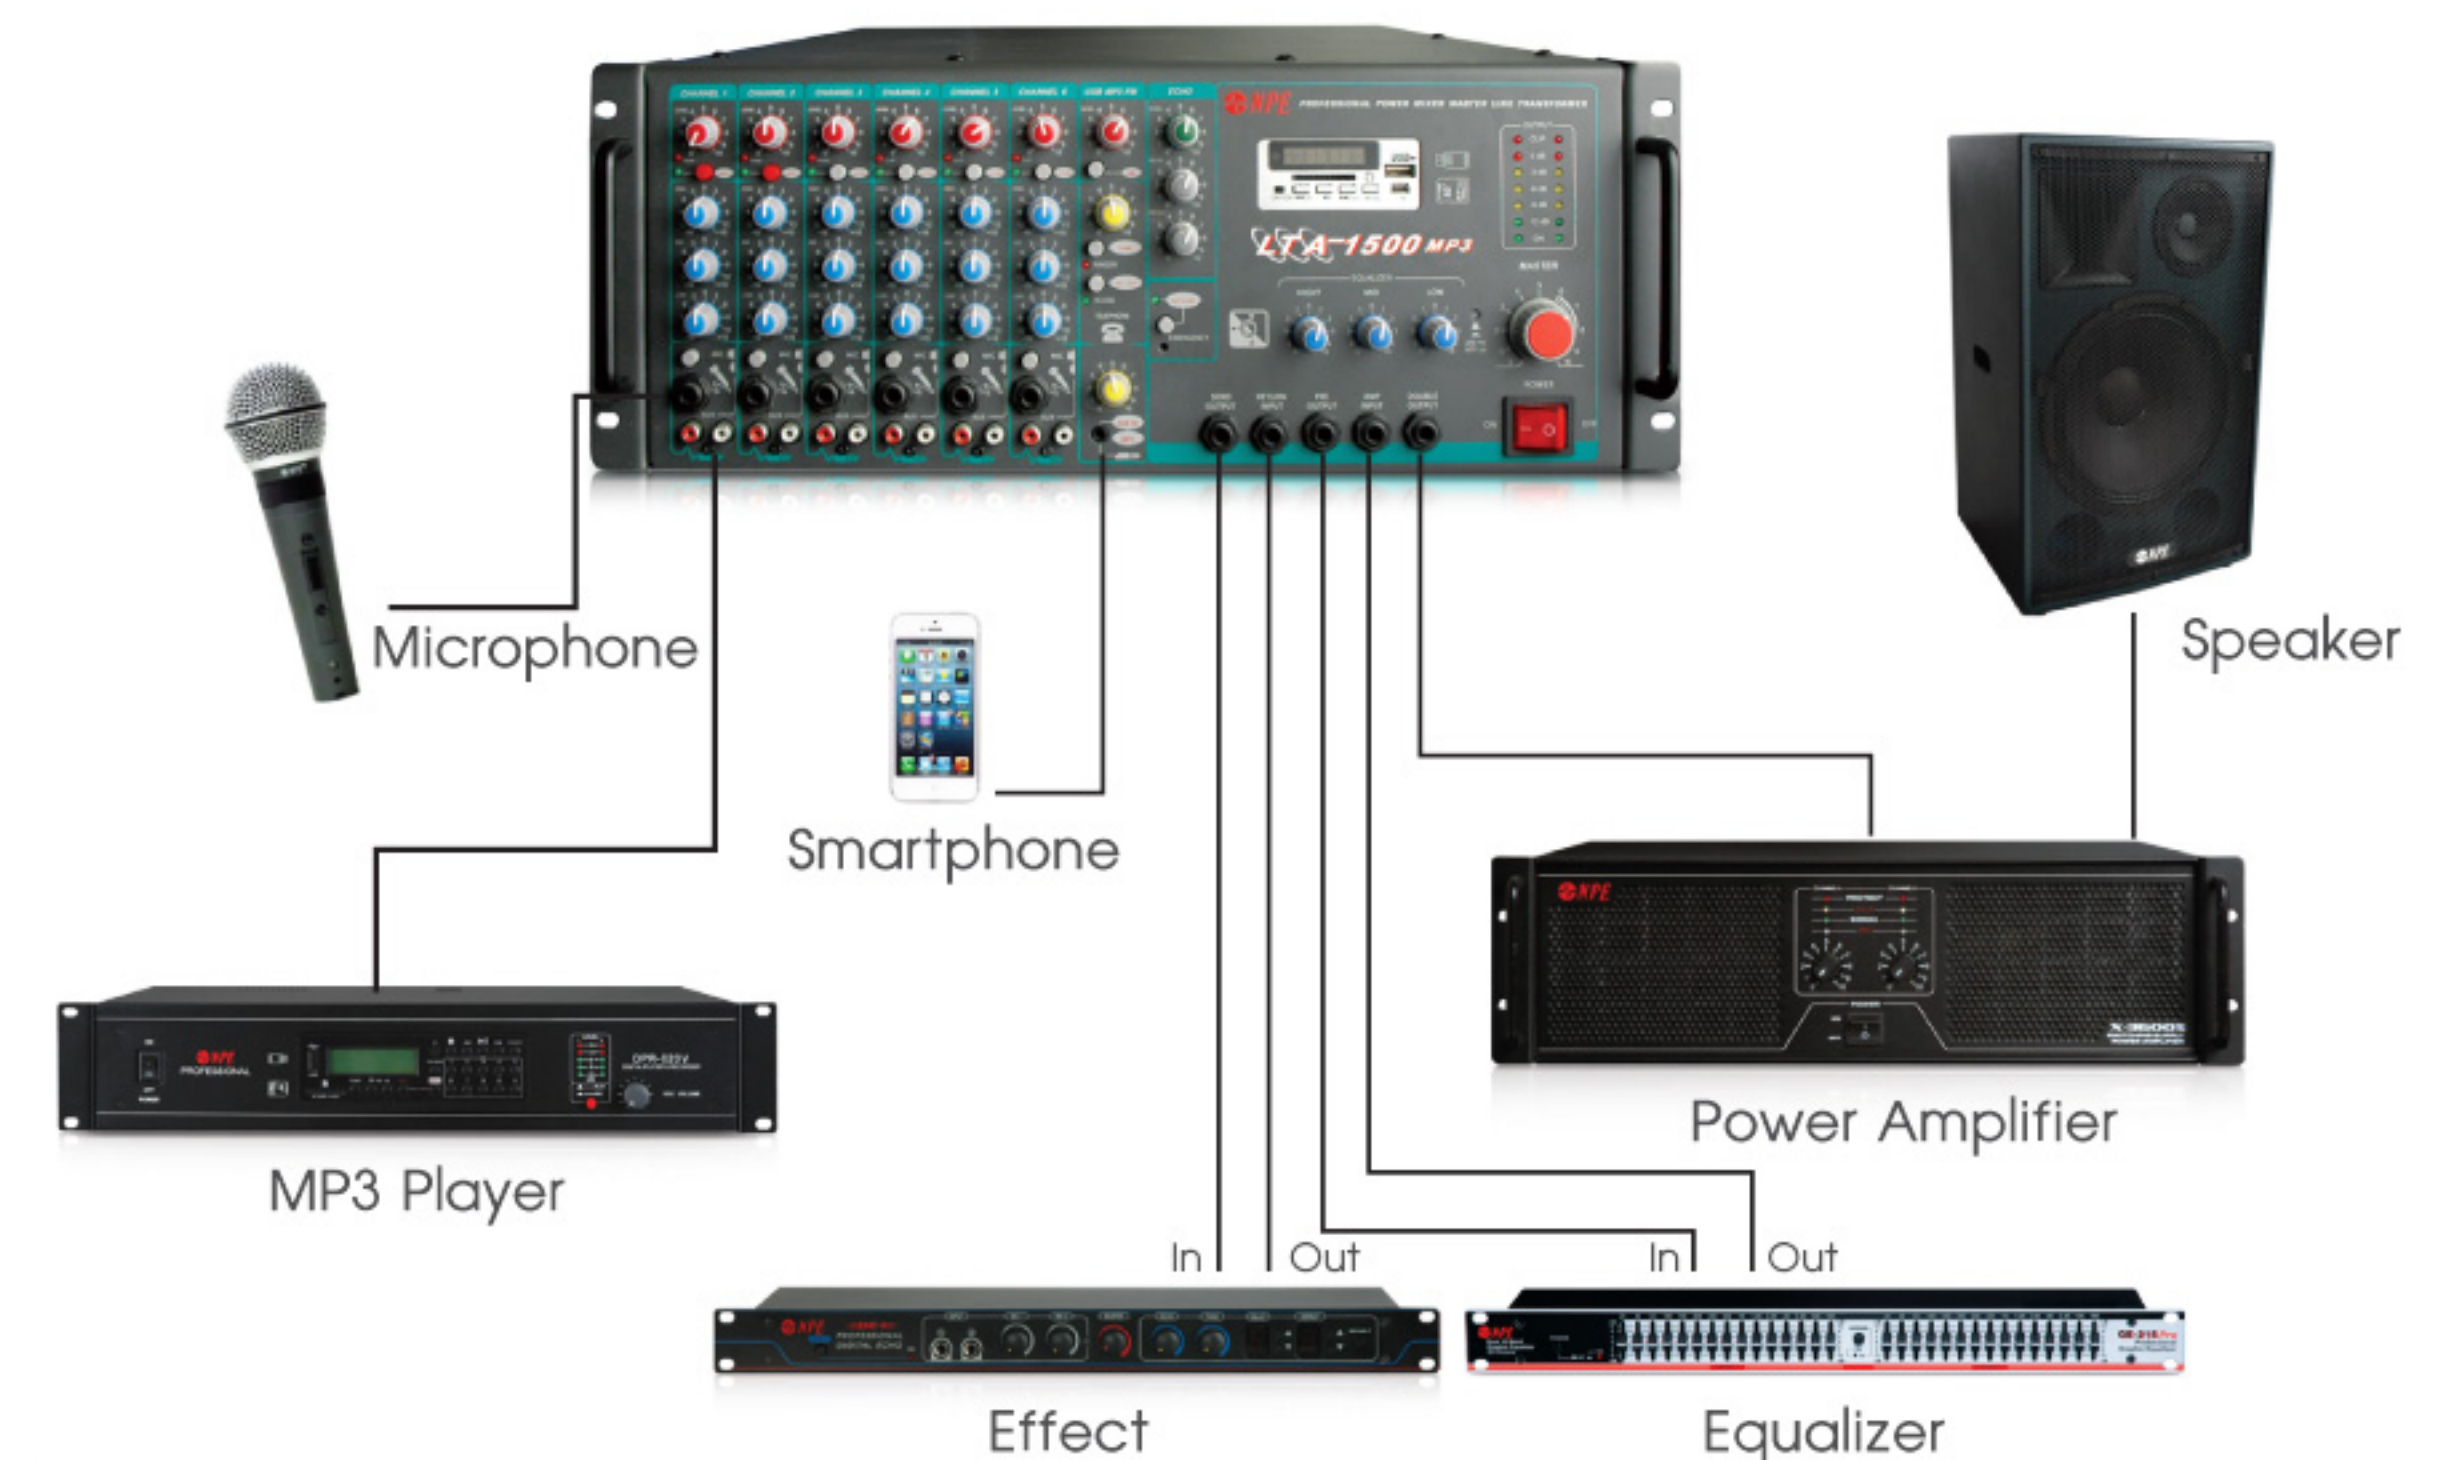

รูปแบบการต่อใช้งานด้านหลัง กับระบบ Line Matching, Hotline Remote

