

MEGAFONÍA / ALTAVOCES / DE SUPERFICIE

SONORA-4TN

100 V LINE TRANSFORMER AND LOW IMPEDANCE SURFACE SPEAKER



- ✓ Crisp, distortion-free sound
- ✓ Excellent finish and elegant design
- ✓ IP-66 protection and salt fog
- ✓ Quick and easy installation



+ Info:

<https://fonestar.com/SONORA-4TN>

ESPECIALLY RECOMMENDED IN:



Hospitality



Education



Hotels



All sectors

DESCRIPTION

Sound reinforcement loudspeaker with 100 V line transformer and low impedance. Based on our extensive experience in the sound sector, FONESTAR has created SONORA. SONORA is a series of speakers specially designed for PA, musical and background sound applications. Its excellent finish and elegant design allow perfect integration in any space. They are fully prepared for outdoor use as they feature aluminium grille and protection against water (IP-66) and marine environments. Besides, SONORA delivers high sound quality with clear, distortion-free sound. They include all the necessary accessories for easy and quick installation: weatherproofed adjustable fixing mount, stainless steel screws and steel safety cable. For public address and ambient sound applications in public places such as restaurants, cafés, supermarkets, shopping centres, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Low-impedance loudspeaker with 100 V line transformer. Prepared for outdoor use, waterproof and rustproof materials.
POWER	60 W max., 30 W RMS
LOUDSPEAKERS	1 x 4" polypropylene woofer 1 x 1" tweeter
RESPONSE	120-20,000 Hz
IMPEDANCE	30 W RMS@100 V (333 Ohm) 15 W RMS@100 V (667 Ohm) 7.5 W RMS@100 V (1,333 Ohm) 3.75 W RMS@100 V (2,667 Ohm) Low Z: 8 Ohm
SENSITIVITY	84.9 dB @ 1 W/1 m
MAXIMUM SOUND PRESSURE	97.6 dB @ máx. W/1 m
COVERAGE ANGLE	H/V: 215°/225° @500Hz, 145°/130°@1kHz, 115°/120°@2kHz, 80°/110°@4kHz (-6 dB)
PROTECTION	IP-66 in compliance with EN 60529 IEC 60068-2-11 Environmental tests (Saline mist)
MATERIAL	ABS (UV resistance) Aluminium mesh grille, with powder-coated finish Weather-resistant mount Stainless steel screws
SWITCH	W selector in high Z and low Z



+ Info:

<https://fonestar.com/SONORA-4TN>


CONNECTORS	Euroblock in and out for cable 0.25 - 2.5 mm ² cross section
TEMPERATURE RANGE	-10°C ~ 60°C
COLOUR	Black (RAL 9005)
DIMENSIONS	Loudspeaker: 125 x 202 x 125 mm depth Mount wall plate: 68 x 110 mm Loudspeaker with mount: 193 mm depth
WEIGHT	1.5 kg
ACCESSORIES	Adjustable mounting bracket ± 60° in all directions. Steel safety cable




+ Info:

<https://fonestar.com/SONORA-4TN>

●  Impedance vs Frequency

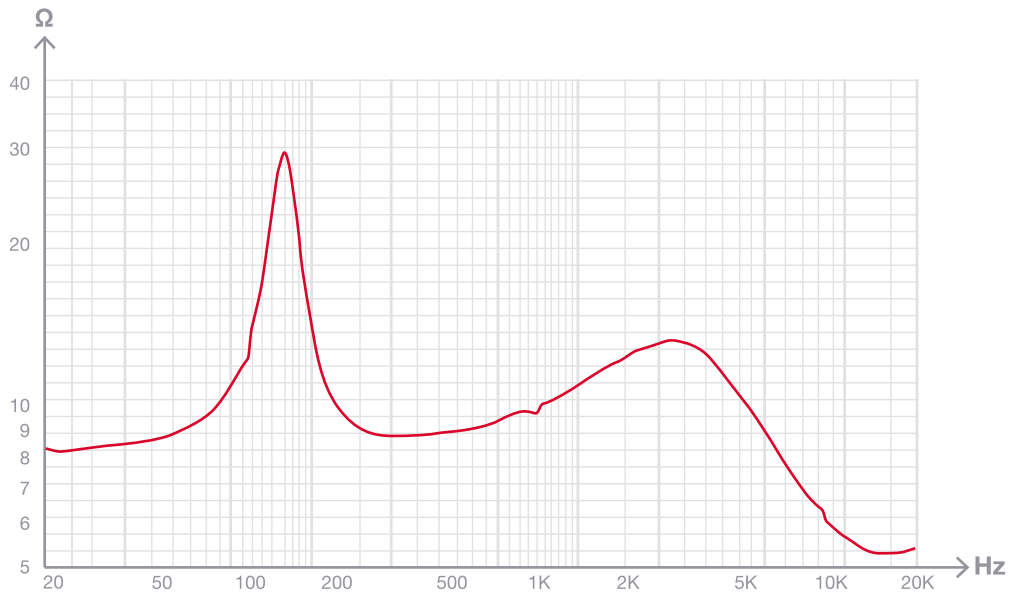

●  SPL vs Frequency

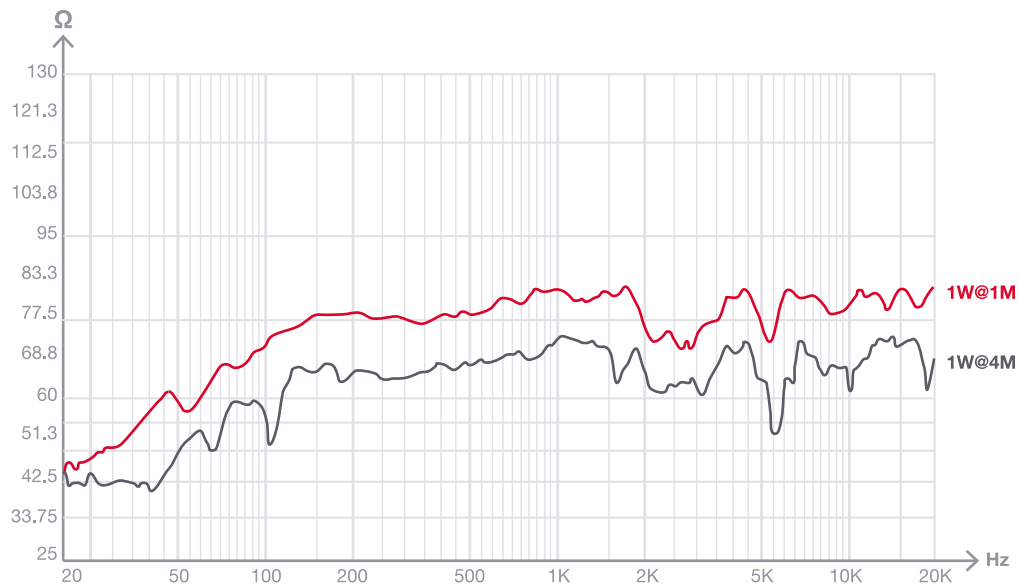


+ Info
<https://fonestar.com/SONORA-4TN>



SPL vs Angle

dB SPL

100
95
90
85
80
75
70
65
60
55
50
45
40
45
50
55
60
65
70
75
80
85
90
95
100

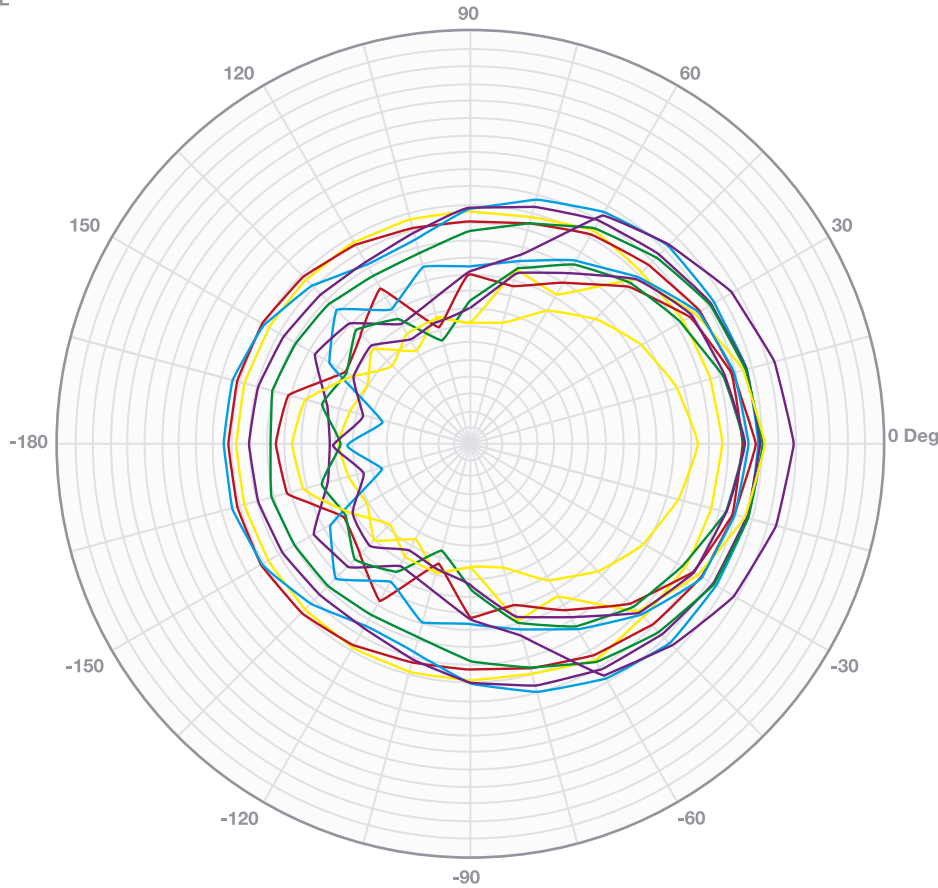

Curve	Freq.	BW	Q	DI
—	441.94	360	1	0.0
—	625.00	120	3.0	4.8
—	883.88	150	2.4	3.8
—	1.25K	120	3.0	4.8
—	1.77K	90	4.0	6.0
—	2.50K	60	6.0	7.8
—	3.54K	60	6.0	7.8
—	5.00K	90	4.0	6.0
—	7.07K	90	4.0	6.0
—	10.00K	60	6.0	7.8
—	14.14K	60	6.0	7.8
—	20.00K	60	6.0	7.8
—	28.28K	60	6.0	7.8
—	40.00K	60	6.0	7.8



+ Info
<https://fonestar.com/SONORA-4TN>

