

## ML-11T

### MICROPHONE LINE INPUT MODULE



The ML-11T is a Microphone/Line input module with a mute send/receive designed for use with 900 Series amplifiers. Phantom power is provided for condenser microphone use.

### Key features


- Connector: removable terminal block

## Specifications

\* 0 dB=1 V

Power Supply	24 V DC (supplied from the main frame)
Current Consumption	25 mA
Input Sensitivity	-60/-10 dB* (changeable)
Input Impedance	10 k $\Omega$ , balanced
Included Accessories	Removable terminal block (3P) ...1, Module mounting screw ...2
Frequency Response	20 Hz - 20 kHz $\pm$ 1.0 dB
Distortion	0.05 % (1 kHz)
Phantom Power	+22 V DC (active or disable selectable)
Connector	Removable terminal block (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 49 g (0.11 lb)

## Dimensions

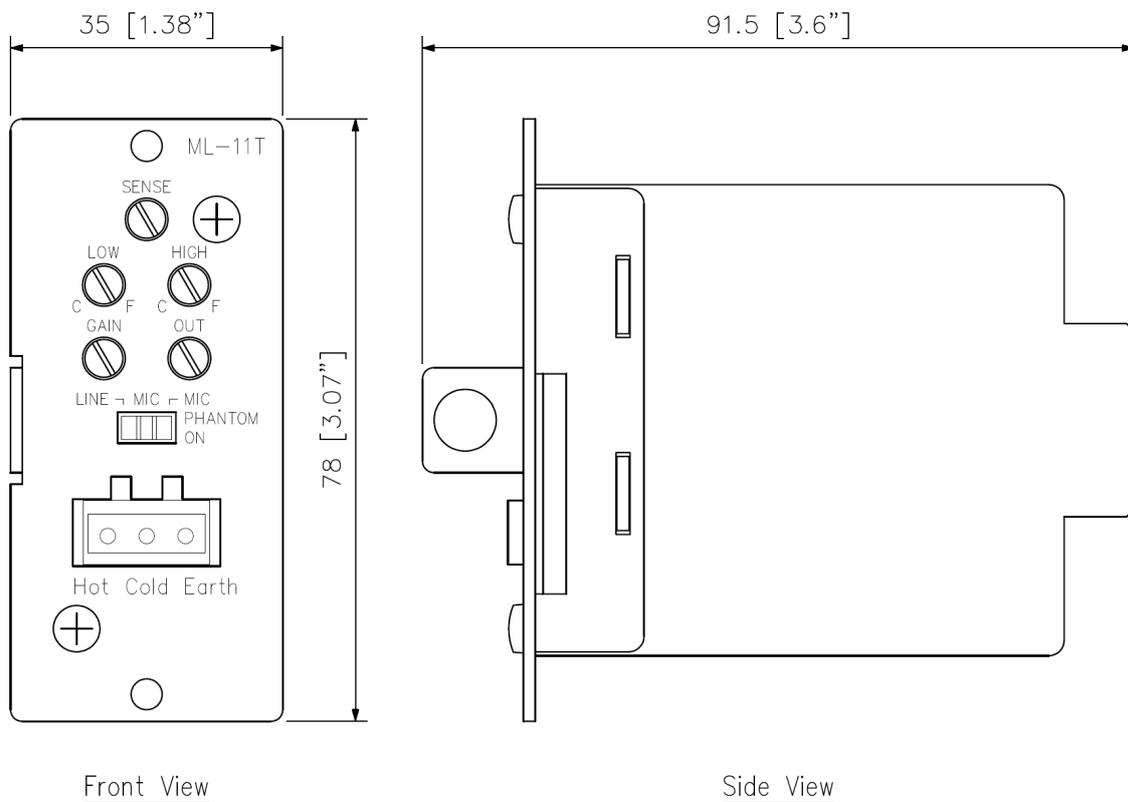

UNIT: mm