


MPR 801 SERIES



- Features : MPR-801GV
- AC Voltage Meter 110V Digital LED สีฟ้าแสดงค่าแรงดันไฟฟ้า 100-300Vac,50Hz,60Hz.
 - Breaker Switch ขนาด 30A ใช้เปิด-ปิดไฟ และป้องกันไฟไหม้เกินพร้อมไฟ LED สีแดงโชว์
 - AC Outlet ขั้วสียบไฟแบบ Outlet Carton 110V 3P 10A 250Vac 8 ชุด
 - สายไฟย่อยภายในแบบแข็ง เบอร์ 1x2.5sq.mm. ทุกช่อง และสายไฟเมน เบอร์ 3x1.0sqmm. ยาว 4 เมตร
 - มีขนาดแท่น 1U สามารถนำไปต่อร่วมเข้าชุด Rocks สำหรับงานเครื่องเสียง

SPECIFICATIONS	MPR-801GV
Display Monitor	Digital Blue LED AC Voltage Meter 100-300Vac Show
Outlet	8 Outlets 3p 10A 250Vac
Maximum Rating (Circuit Breaker)	30A, 250Vac, 50Hz,60Hz Continuous Duty
Indicator	Power on LED Red
AC Wire Size/Length	3x1.0sq.mm./4M
Dimensions/Dimensions Packing (WxHxD)	483x44x205mm./510x70x245mm.
Weight/Gross Weight	2.4kg(5.28lbs)/2.7kg(5.94lbs)

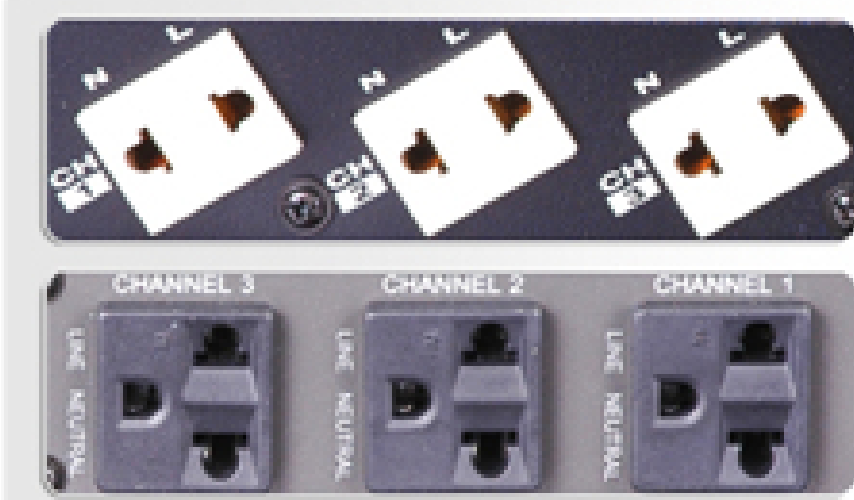

SPECIFICATIONS	MPR-801G	MPR-801
Maximum Rating (Circuit Breaker)	30A, 250VAC, 50Hz Continuous Duty	30A, 250VAC, 50Hz Continuous Duty
Outlets	8 Outlets 2p 15A With Ground	8 Outlets 2p 15A
Protection	Circuit Breaker	Circuit Breaker
Indicator	Power on LED	Power on Lamp
Cable	PVC 3x1sq.mm. 4M	PVC 2x1.5sq.mm. 3.5M
Dimension (WxHxD)	482.6x44x160mm.	482.6x44x150mm.
Weight	2.4kg(5.28lbs)	2.65kg(5.83lbs)