Digital Wireless Guide Receiver WG-D100R


■ SPECIFICATIONS

Model number	WG-D100R-EB WD4D00	WG-D100R-AS WM1D00	WG-D100F	R-AS WC4D01
Frequency	863-865MHz	510-530MHz	748.3-757.7	803.3-805.7MHz
Modulation	GFSK			
Audio sampling	8KHz 16bit			
Latency	22ms			
Frequency response	65Hz-3.8kHz			
Dynamic range	> 80 dB			
Signal to Noise	> 70 dB			
THD at 1KHz	< 1.5%			
Service coverage	Indoor: 100m / Outdoor: >150m			
Operating temperature	-10 ~ 50℃			
Receiver sensitivity	-88 dBm			
3.5mm phone jack	Earphone output x 1 (32 Ω) / Aux out x 1 (0 Ω)			
Front + & - buttons	Channel selector			
Power button	Power on / off			
Side Momentary 3way tact switch	+: Volume up			
	Center push : Corresponding frequency			
	- : Volume down			
Battery	Ni-MH type "AA" 1.2V x 1 / Alkaline "AA" 1.5V x 1			
Battery life (approx.)	14 hr			
w/ 2600mAh battery	The data has been measured using 1x AA NiMH 2600mAh rechargeable battery.			
Charging source	DC 5V Micro USB			
Charging time	Depends on battery type and capacity			
Charging current	255±10 mA			
LCD display	Channel, Battery indicator, Volume, Signal Strength			
Antenna	Headphone			
Regulatory compliance	CE FCC			
Dimension	$40(W) \times 24.6(D) \times 83.5(H)$ mm , Antenna length not included			
Weight	38.6 g (batteries not included)			
Color	Black frame			
Accessories				
Ear phone : EP-01	0	0		0
Belt clip : BC-01	0	0		0
Lanyard(Red) : LY-01R	0	0		0
Ni-MH rechargable battery : RB2600	0	×		X
Universal USB adapter : MUA-11	×	0		0
USB cable : USBY-01	X	0		0




Digital Wireless Guide Receiver


WG-D100R




Front view

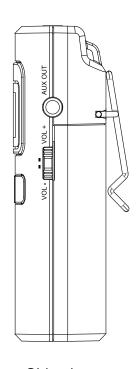


Side view

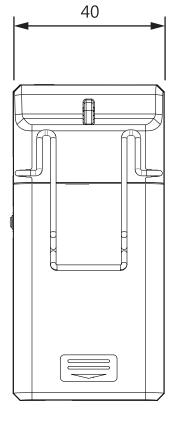

Rear view



Top view



Bottom view

UNIT: mm SCALE: 1/1