

## IP-1000CI

### CONTACT INPUT UNIT



IP-1000CI is an IP control input and output unit, which is used for receiving alarm signal from fire center and triggering to broadcast warning announcement.


### Key features

- Receive alarm signal from fire centre and trigger to broadcast warning announcement.


## Specifications

Power Supply	220 V AC, 50Hz
Network Protocol	TCP/IP, UDP, ARP, ICMP, IGMP
Dimensions	483(W) x 32(H) x 259(D) mm
Weight	2.9kg
Included Accessories	4P connecting terminals x4, 5P connecting terminals x8, power line (3*1.0mm <sup>2</sup> /1.5m) x1


## Dimensions



Rear View

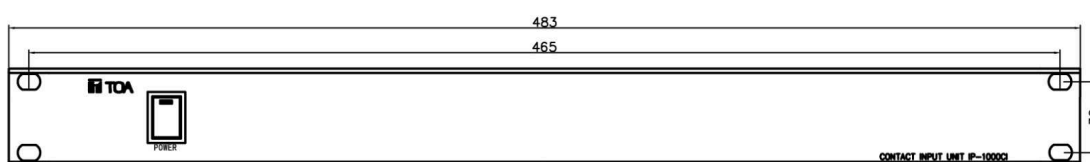

Front View

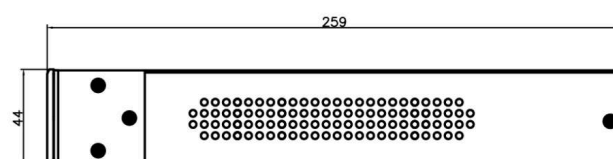

Side View

UNIT: mm SCALE: 1/4